

Notes: 1. Net Weight = Approx. 5.0 lb / 2.3 kg		REVISIONS		
		DESCRIPTION	APPR / DATE	
2. Material: 12 GA (0.105") CRS,	1	NEW ISSUE	RAF 01/28/25	
weather-resistant coating  3. WLL: 50.0 lb / 22.7 kg  4. Includes 4x each M10 socket head ca screws, split washers, flat washers  5. Fits: EX826, EX896		R0.22 [R		
11.81 [300.0] Inside		0.50 [12.7]	[95.3]    -             	
		0.50 [12.7]	[27.5]	



CAUTION: Fulcrum Acoustic's YK yoke brackets are intended to facilitate loudspeaker installation. The installer is solely responsible for determining if the mounting structure is suitable to bear the weight of the loudspeaker plus bracket and for selecting appropriate 3<sup>rd</sup> party installation hardware. Due to the wide variety of possible installation conditions Fulcrum Acoustic cannot guarantee a bracket's suitability or load rating for every application. The installer should engage persons and/or companies that specialize in rigging disciplines to review the totality of a rigging design and provide a properly engineered solution.

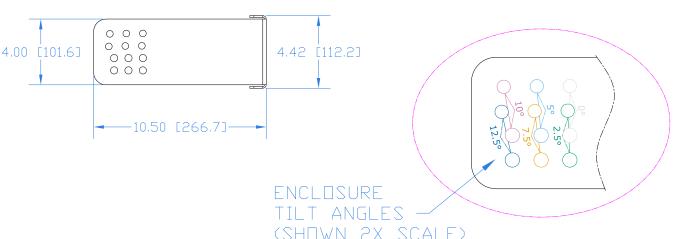



THIS DRAWING IS THE PROPERTY OF FULCRUM ACCUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOU WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES

TOLERANCE IN INCHES X±.1 .XX±.015 .XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2°

(X.XX) = REF DIMS NO TOLERANCE IMPLIED

TSC = THEORETICAL SHARP CORNER

DIMENSIONS ACROSS CENTERLINES TO BE SYMETRICAL

STATUS RELEASED			
APPROVALS	DATE	1 MAIN STREET, WHITINSVILLE, MA 01588 USA	
DRAWN: RAF	01/28/25	TITLE: Mechanical Spec,	
DE W	01/28/25	YK-EX8 Yoke Bracket	
DES ENG:		A SHEET 1 OF 1 SCALE: 1:6	
MFG ENG:	_	DWG. ND. 820-300-058 REV 1	

01/28/25